

# SUBMITTAL DATA SHEET



Series Name: Extreme Heat AHU Series  
Model Number: DLCURAH48ABK / DLFUAAH48XAK

## Wall Mounted Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



## INDOOR SPECIFICATION

Indoor Air Flow (H/M/L) (CFM)	1470.59/1282.35/1094.12/905.88	
Indoor Noise Level (H/M/L) (dBA)	50/47/43.5	
Dimension (WxDxH)	inch	21 x 21 x 49
	mm	534 x 534 x 1245
Package (WxDxH)	inch	26-5/8 x 24-3/8 x 52-1/2
	mm	675 x 620 x 1335
Net/Gross Weight	lbs	131/156
	kg	59.2/70.9

## OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Refrigerant	R410A	
Factory Charge	1460±15ml	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	4412	
Outdoor Noise Level (dBA)	64	
Dimension (WxDxH)	inch	37-1/2 x 16-3/8 x 52-1/2
	mm	952 x 415 x 1333
Package (WxDxH)	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1095 x 495 x 1480
Net/Gross Weight	lbs	220/249
	kg	99.9/112.9

## EFFICIENCY

Cooling		Heating	
SEER2	15.6	HSPF2-4	9.4
EER2	8.2	COP	3.2

## PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	47000
Min/Max Capacity	15000-48000
Moisture Removal	4.96 L/H (10.47pint/H)
Standard Operating Range	5°F-122°F (-15°C-50°C)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

## PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated (Min/Max)	50000(11000-55000)
2. @ 17°F Rated	36000
3. @ 5°F Max: Capacity / COP	46000 / 1.9
Standard Operating Range	-22°F-75°F (-30°C-24°C)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


## ELECTRICAL

Power Supply	208/230V, 1Ph, 60Hz
System MCA	40/7.5
Connection Wiring	AWG 14-2
System MOCP	50/15
Compressor RLA	33
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	6
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	5731(815-5700)
System Power Input @ Heating (W)	4652(830-5700)
<b>Recommended breaker size(A)</b>	<b>40/15</b>
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

## PIPING

Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm)
Drain Size	5/8in (15.88mm)
Max. Piping Length	213.3ft (65m)
Max. Height Difference	98.4ft (30m)
Max. Pre-charged Length	25ft (7.5m)
Refrigerant Pre-charged Amount	169.31oz (4800g)
Additional Charge of Refrigerant	0.69oz/ft (65g/m)
Connection Method	Flared


### Indoor Unit Dimension

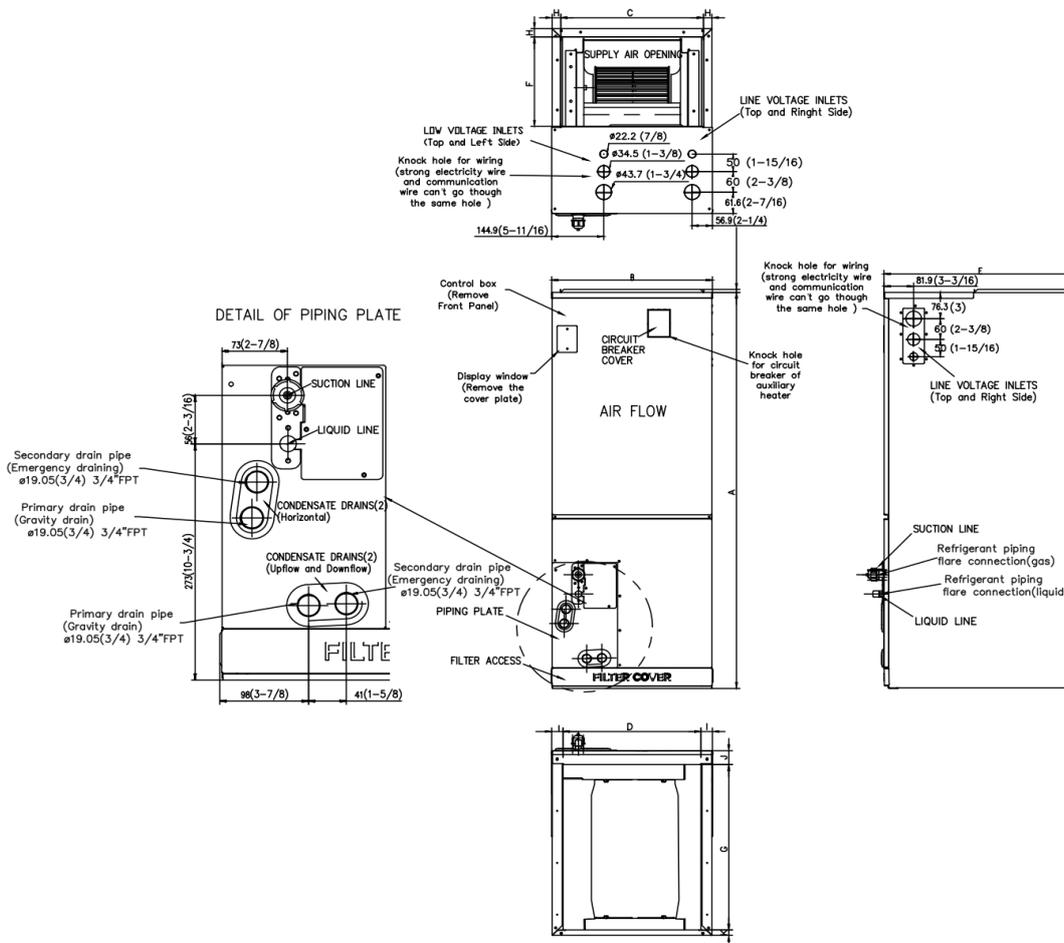


Dimensions	Model	18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Fan Performance

48K

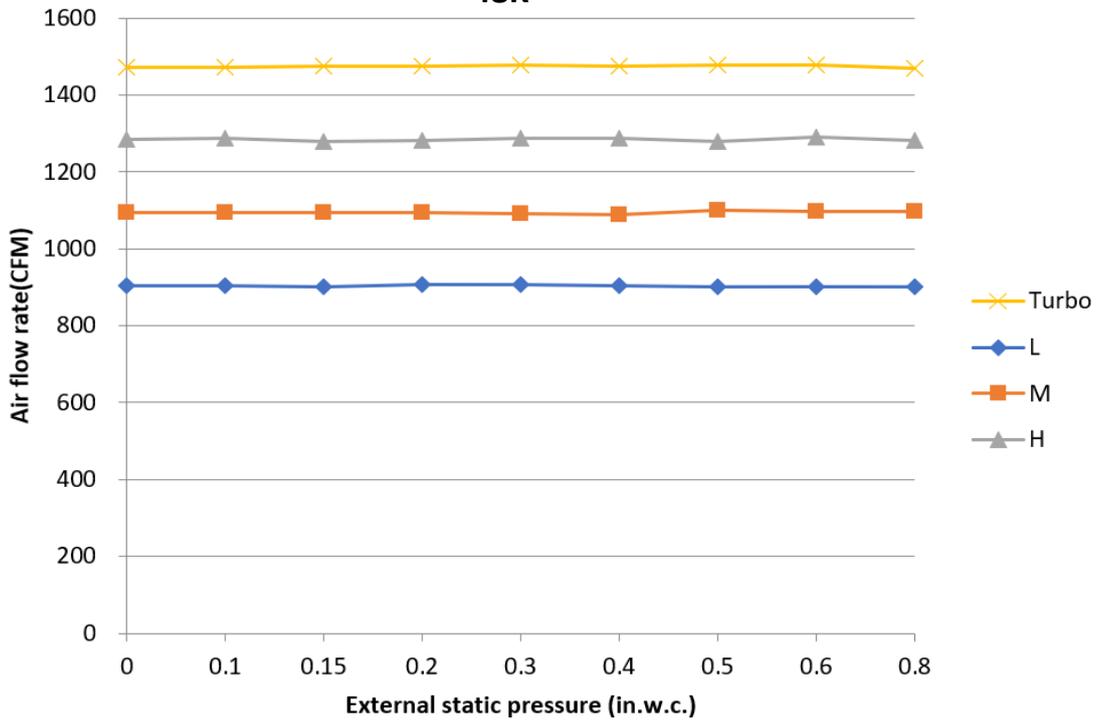


Outdoor Unit Dimension

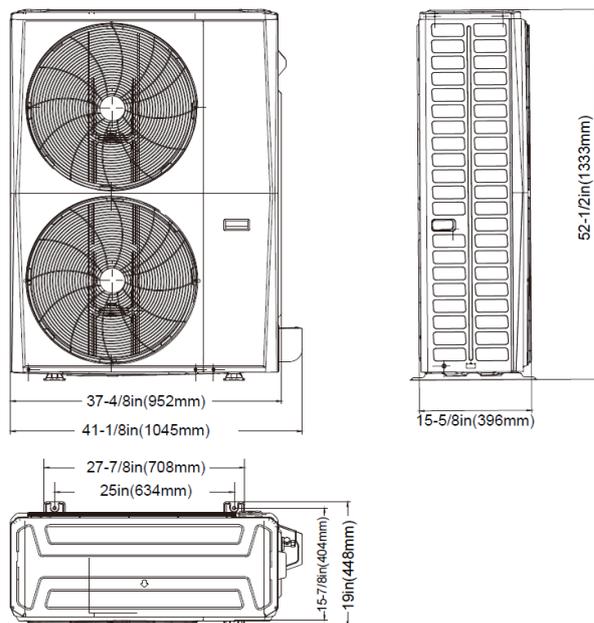

Installation Instruction

REQUIRED CLEARANCE

\*1 20in. (500mm) or more when front and sides of the unit are clear

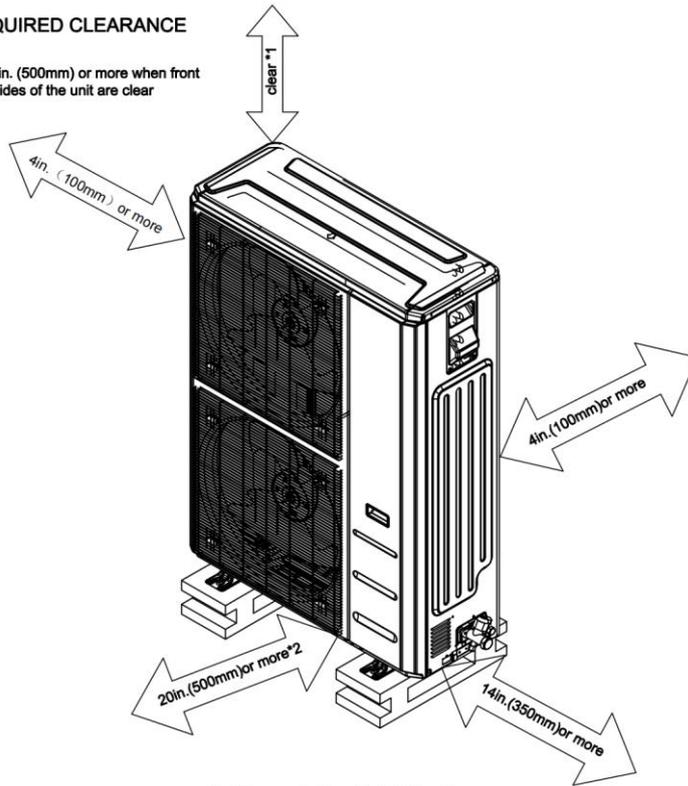

\*2 When any 2 sides of left, right and rear of the unit are clear