

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: EP High Tier Series
Model Number: MSESU-H09B-2A/MO1SS-H09B-2A

High Wall Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	559 / 424 / 212 / 153 / 153
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	42 / 42 / 33 / 23 / 19
Dimension (W×D×H)	inch 38 x 9-3/8 x 12-1/2
	mm 965 x 239 x 319
Package (W×D×H)	inch 43-1/8 x 12-3/4 x 15-3/4
	mm 1095 x 325 x 400
Net/Gross Weight	lbs 28 / 37
	kg 12.8 / 16.7

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KTM110D79UFZA3
Refrigerant	R454B
Refrigerant Oil Charge(mL)	500
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1,471
Outdoor Noise Level (dBA)	57
Dimension (W×D×H)	inch 35 x 13-1/2 x 26-1/2
	mm 890 x 342 x 673
Package (W×D×H)	inch 39-1/8 x 15-5/8 x 29-1/8
	mm 995 x 398 x 740
Net/Gross Weight	lbs 100 / 108
	kg 45.2 / 48.9

EFFICIENCY

Cooling	Heating
SEER2 33.3	HSPF2-4 22.0
EER2 17.0	COP 3.60

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	9,000
Min/Max Capacity	3,100~16,500
Moisture Removal(L/h)	0.5
Standard Operating Range(*F/*C)	-22~122 (-30 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	12,000
1. @ 47°F Min/Max Capacity	4,100~17,200
2. @ 17°F Rated	11,000
3. @ 5°F Rated: Capacity / COP	13,500 / 2.00
3. @ 5°F Max: Capacity	13,500
Standard Operating Range(*F/*C)	-22~75 (-30 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208 / 230V, 60Hz, 1Ph
System MCA	16.0
Connection Wiring	AWG 14 / 4
System MOCP	20.0
Compressor RLA	11.6
Outdoor Fan Motor RLA	0.7
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	0.7
Indoor Fan Motor W	60
System Power Input @ Cooling (W)	529 (180 ~ 1,380)
System Power Input @ Heating (W)	977 (200 ~ 1,585)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV
Liquid Size	1/4" (6.35mm)
Gas Size	3/8" (9.52mm)
Max. Piping Length(ft/m)	82 (25)
Max. Height Difference(ft/m)	49 (15)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/g)	44 (1.25)
Additional Charge of Refrigerant((oz/ft)/(g/r	0.16 (15)
Connection Method	Flared

Indoor Unit Dimension

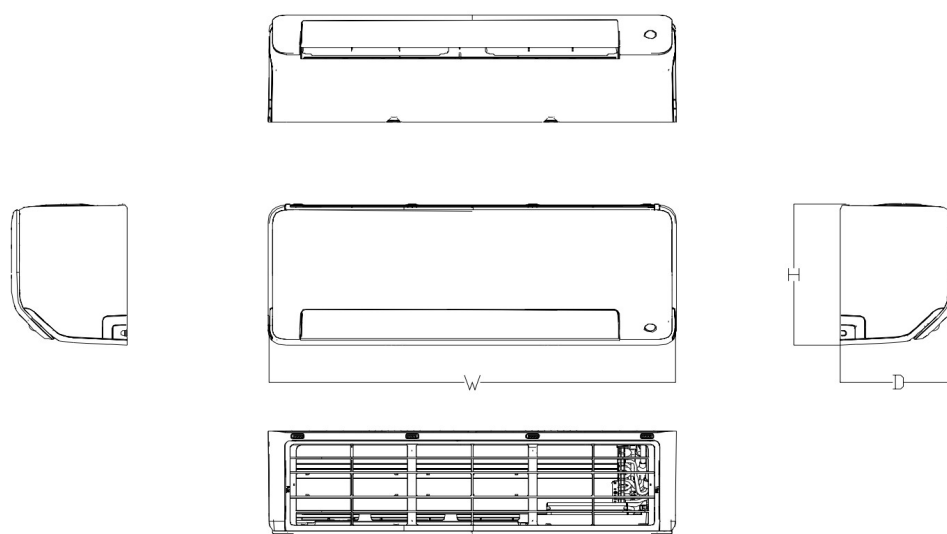

Capacity	Body Code	Unit	W	D	H
9 k~12k	C	mm	965	239	319
		inch	38	9-3/8	12-1/2
18k	D	mm	1140	275	370
		inch	44-7/8	10-7/8	14-1/2




Installation Instruction

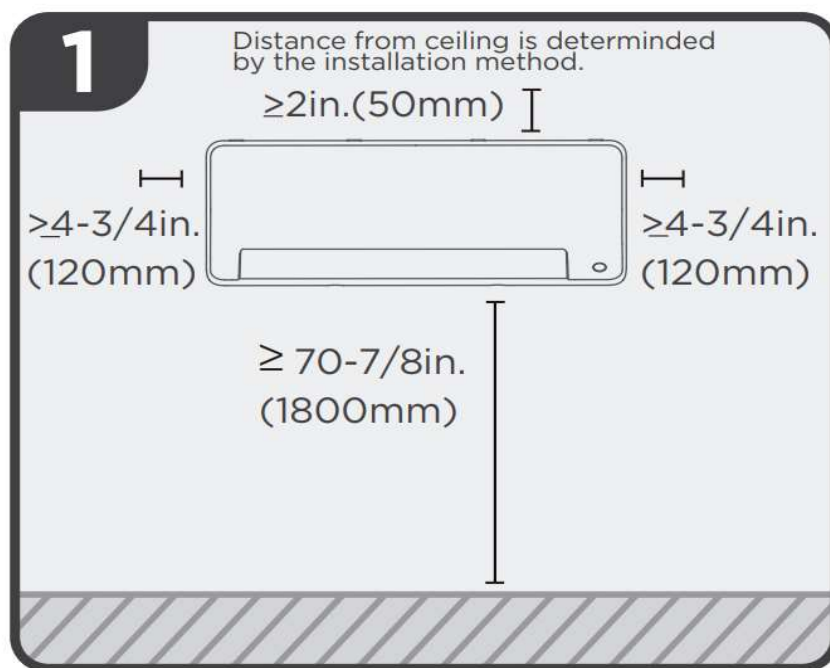


Select Installation Location

Outdoor Unit Dimension

Unit: inch (mm)

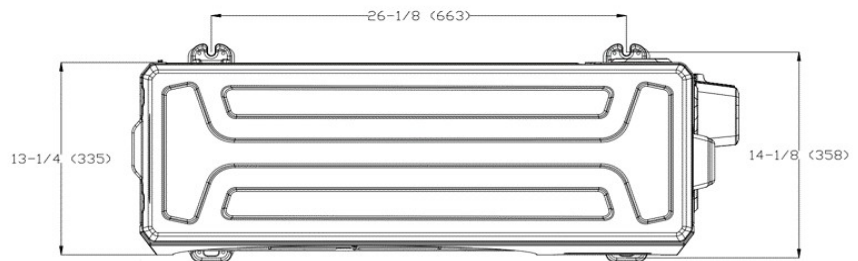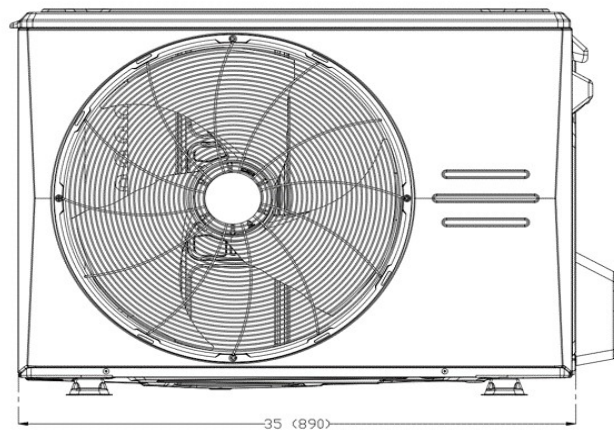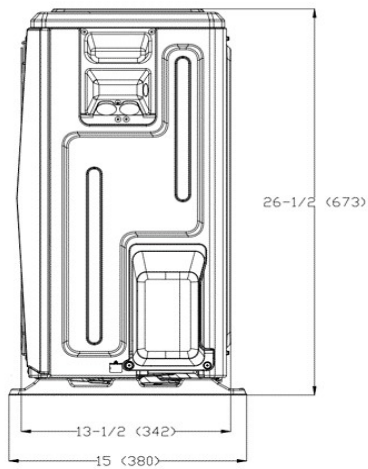

Installation Instruction

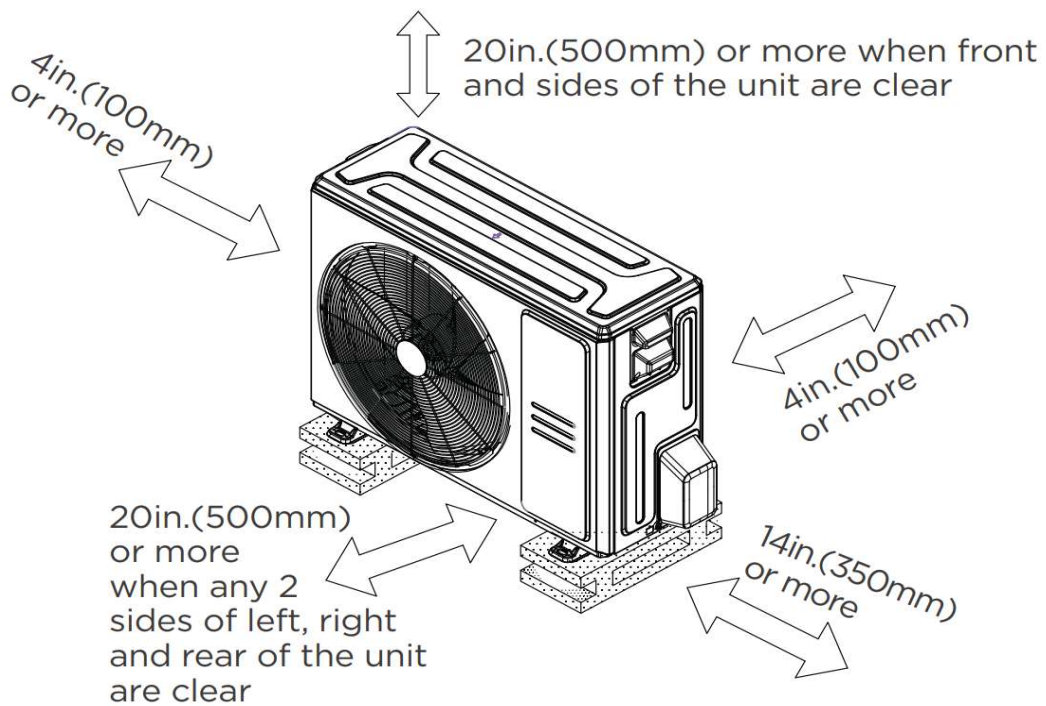

FEATURES

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
 - Two-way communication wired controller:120N(X6)
 - Two-way communication wired controller with built-in Wi-Fi: 120N (X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.